

Fitting instructions for part number C1260 – Toyota Alphard km/h to MPH Conversion Dial Face.



1. Cut off the projecting tab.
This is usually white.



2. Pry out one leg clip.....
(These are usually clear)




2a. as one edge of the dial is
lifted up.




3. Having released one clip, the
dial will come away.



4. Take the 3mm thick (20 x 10 mm)
Adhesive squares.....

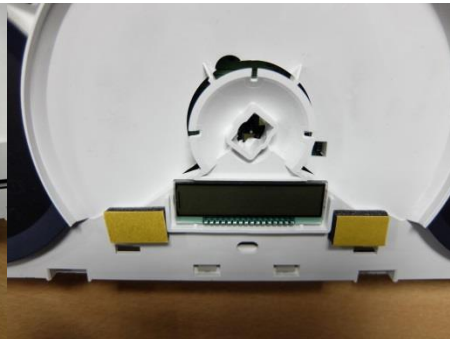

5. stick as shown.

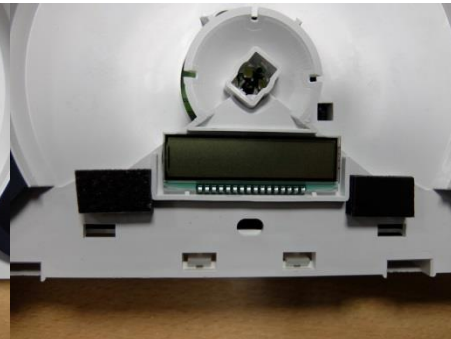

6. Remove paper to reveal
adhesive.



7. Place new dial face down into
back of the front mask



8. whilst holding dial in place
lower mask onto back plate.



9. Using a soft cloth make sure dial
adheres to the adhesive squares



10. Toyota Alphard MPH dial
fitted. (C1260)

IF YOU REQUIRE BETTER
RESOLUTION IMAGES OF THESE
INSTRUCTIONS PLEASE EMAIL
YOUR REQUEST TO:

SALES@LOCKWOODINTERNATIONAL.CO.UK

No responsibility will be accepted by Lockwood International
Ltd for any damage caused whilst, or as a result of fitting
these dials.