




1: Lay replacement dials into the cluster.



2: Crease each leg at the point shown here.

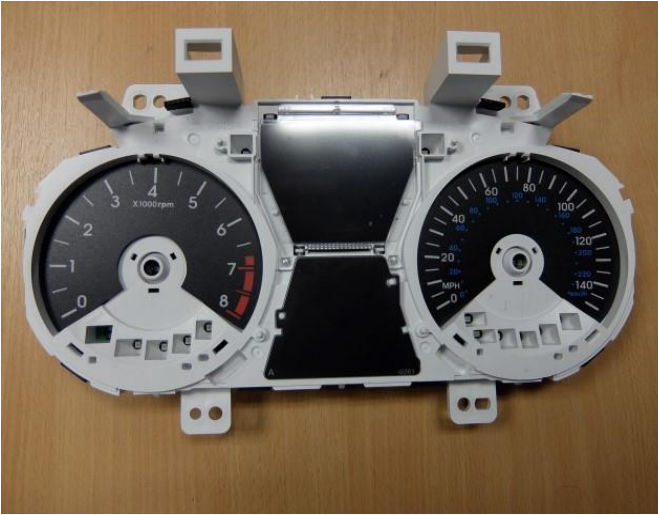

3: Crease each tab at the point shown here.




4: Bend the symbol panel inwards as shown.



5: Symbol panel ready to fit.



6: Position the symbol panel.

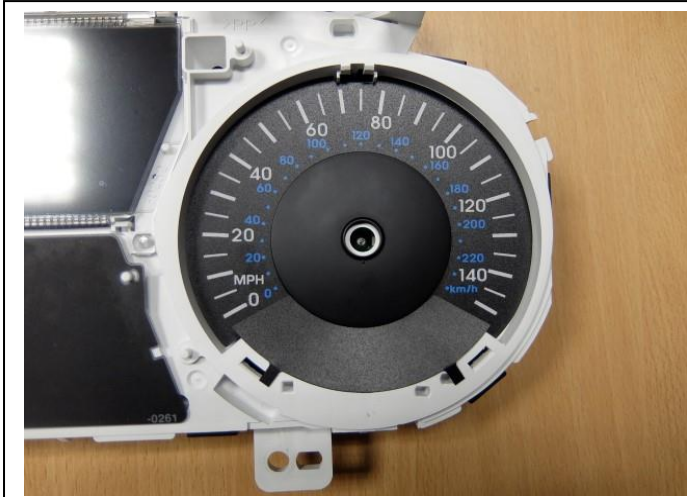


7: Clip on the center panel.



8: Position the outer ring panel.



9: Clip on original outer bezel.

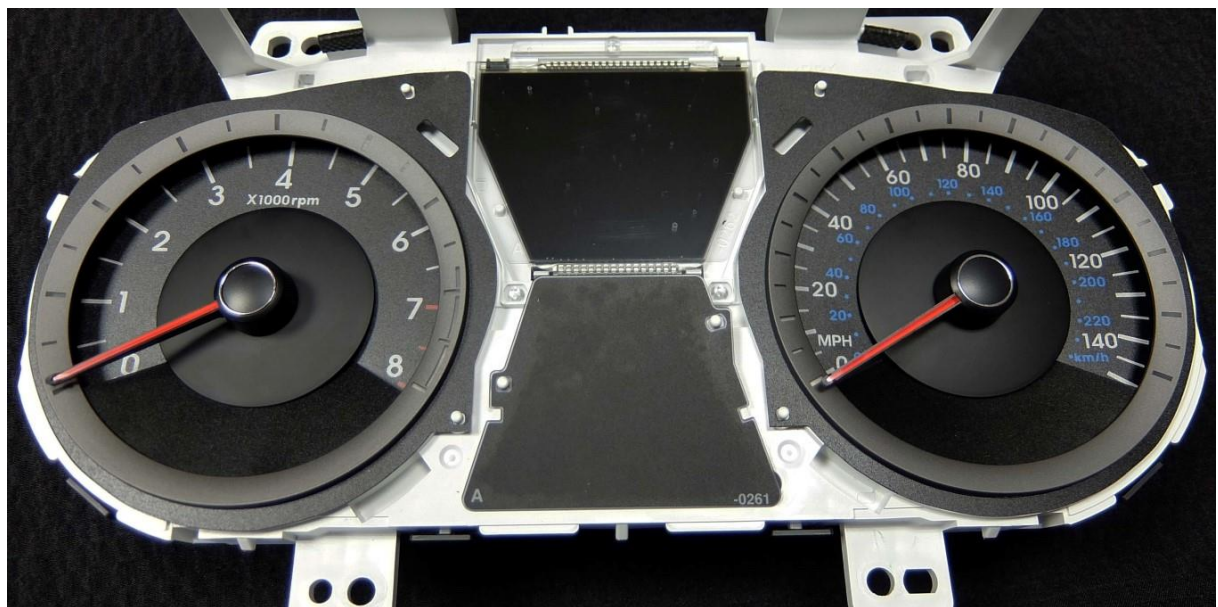

Elantra Fitted Dials and Needle Pointers.