





Remove dial face from cluster

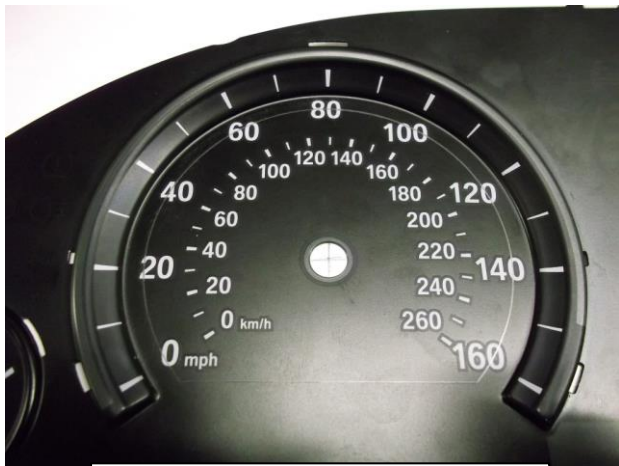


Mark position of cut with a pencil

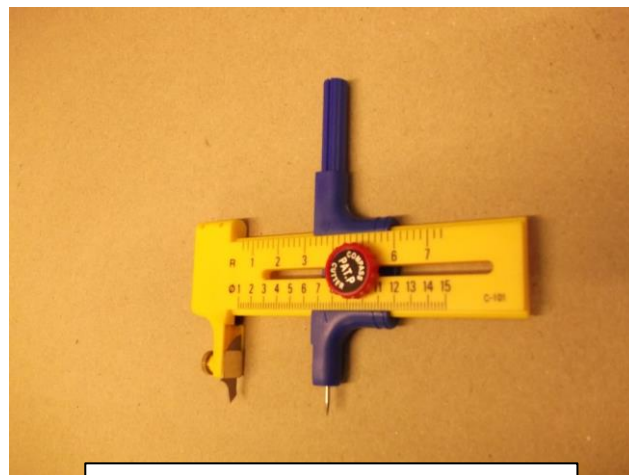

Use a suitable craft type cutting tool



Carefully cut the arc on the pencil mark

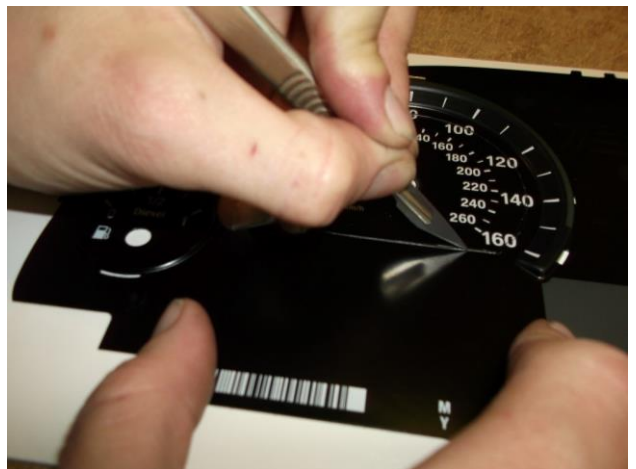


Cut the bottom edge as shown




Remove the cut section of dial.....



.....to leave this effect.

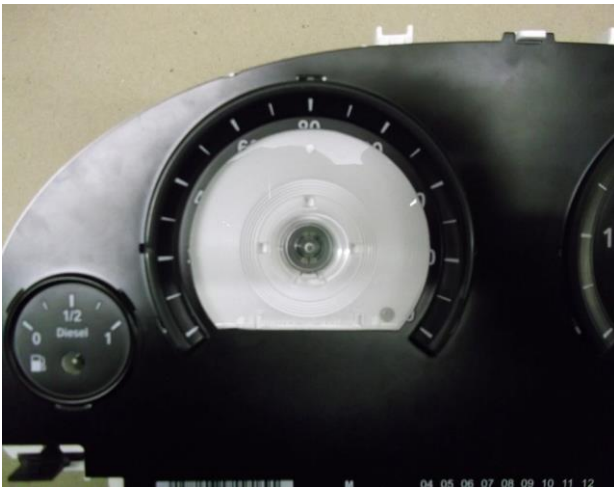

Replace dial on cluster back plate

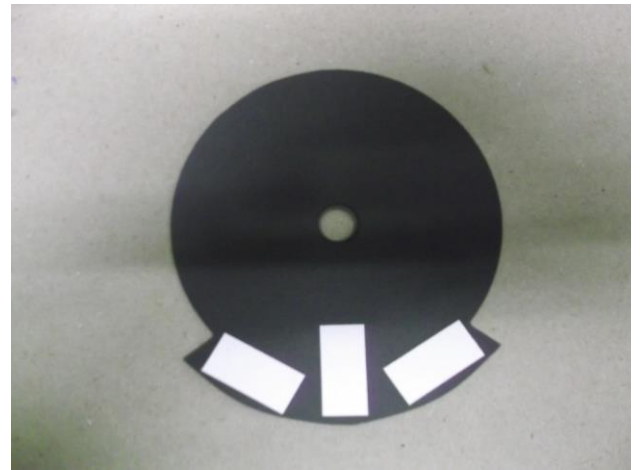

Remove cover from adhesive pads on new dial



Place and fix dial face in position and wipe off any finger marks.



Replace front of cluster and lens



Fitting completed

Image shows km/h dial fitted to MPH cluster. The same effect is achieved when fitting MPH dial to km/h cluster